

Written By: Ross Light



INTRODUCTION

A guide to accessing the GPS sensor.

Step 1 — Back Cover



- Remove 4 rubber caps covering each screw by inserting the screwdriver into the side of cap and prying back and forth.

 Please note: this is a tedious process, but be patient.

Step 2



- Remove the 4 screws holding the cover in place using a Philips #00 screwdriver.


Step 3



- Open the back cover.

⚠ Lift the cover slowly and carefully; the speaker is screwed on the back cover and is connected to the circuit board.

Step 4

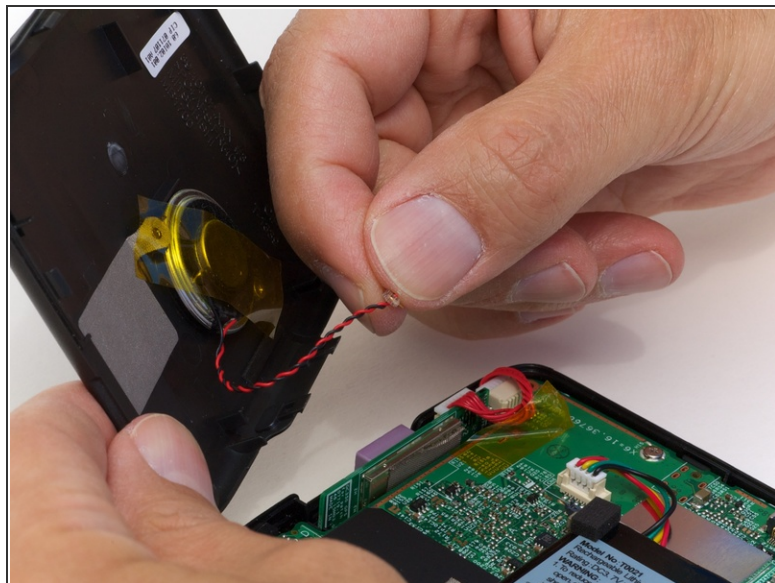

- Disconnect the speaker from the terminal.


- ☛ When reassembling, make sure that you plug the terminal in the same way. The black wire should be on the side farthest from the battery.

Step 5 — Logic Board




- Unscrew the 2 screws on either side of the board.

Step 6

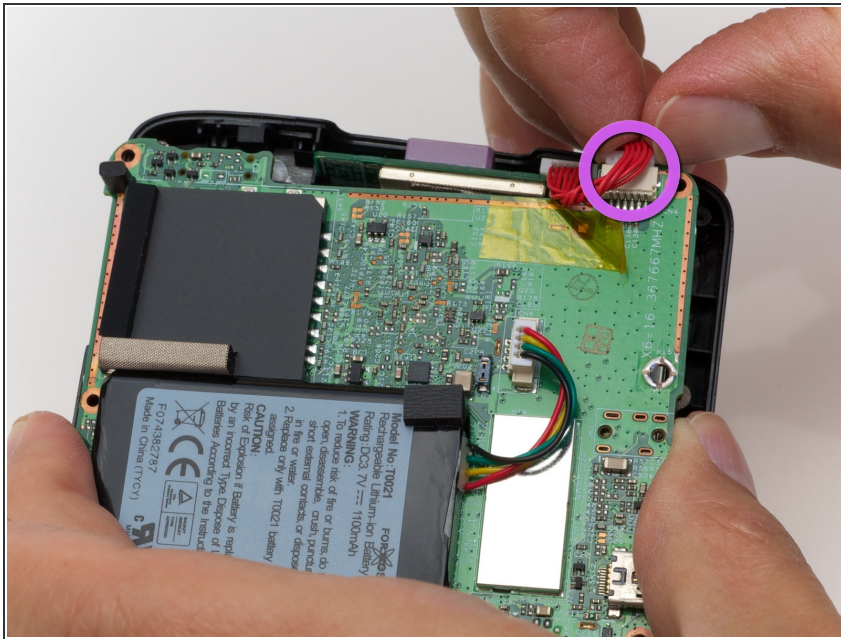

- Lift the circuit board up and disconnect the GPS connector.

Step 7 — GPS Sensor

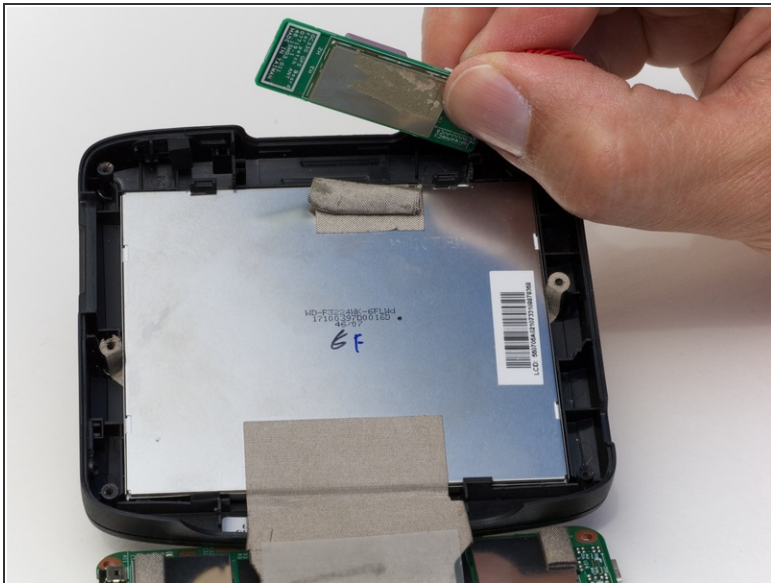

- Carefully flip the circuit board out so you can get to the sensor easily.
- Remove the tape holding the sensor to the display and take out the sensor.

To reassemble your device, follow these instructions in reverse order.

